Installation of 2nd Cytavision Set Top Box

Instructions for installing the ADB Set Top Box (STB)

Firstly you need to connect the ADB Set Top Box as per the illustration below. The ADB Set Top Box uses an HDMI cable for newer TV sets (LCD, Plasma) or a SCART cable for older models. Detailed installation instructions for the ADB Set Top Box are provided on Page 34, Section 3.3 of the Installation and User Guide that is included in the package.

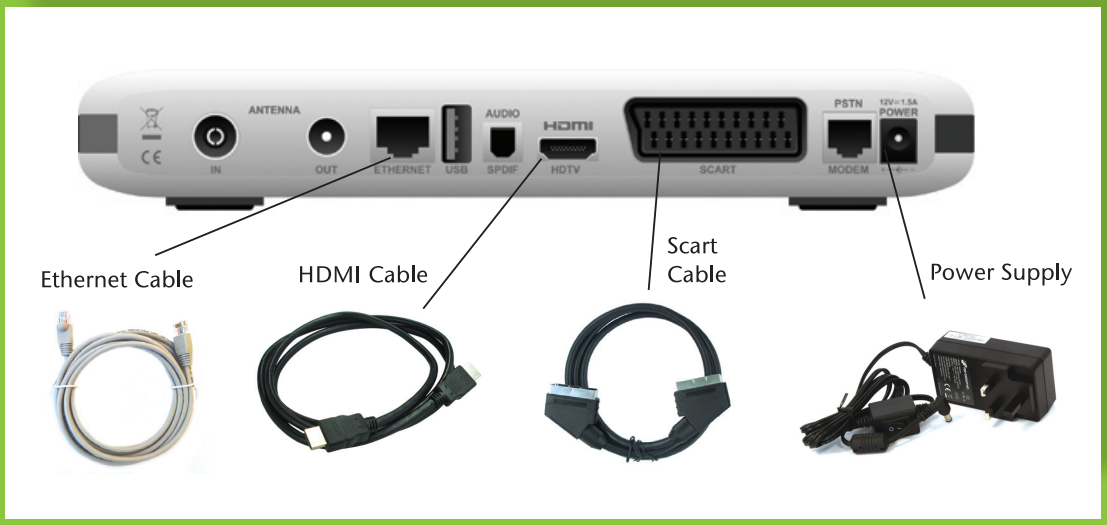

When you switch on the Set Top Box, you will see 5 balls on your TV screen which will all turn green.

cyta Get closer, touch the world

Next, this may appear onscreen:

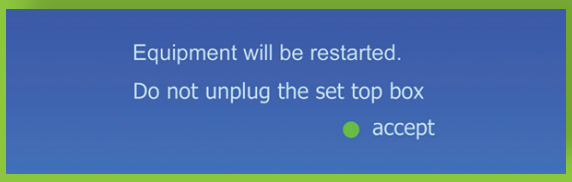

Then, the 5 balls will reappear. Once the first one turns green, 10 smaller balls underneath will successively turn green. When all the smaller ones are green, the activation process will continue with the other four balls turning green.

Next, the software loading screens will appear:

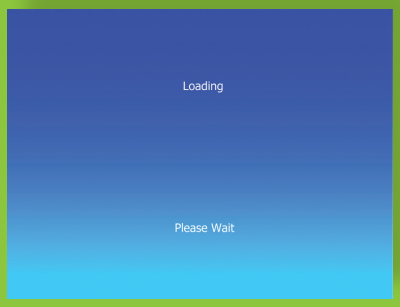

Now you need to register as a user of the service, using the Cytavision remote control, and entering the following information onscreen:
User ID
(8-digit subscriber number):

.....

Password: 123

On the registration screen, the first field (User ID) appears in yellow. Press **OK** on the remote control to enter the subscriber number you were given at the Cytashop. Then press the down arrow key ▼ to move to the Password field. Press **OK** again on the remote control to activate the field and enter 123 as your password.

If you have correctly entered the information, the following screen will appear:

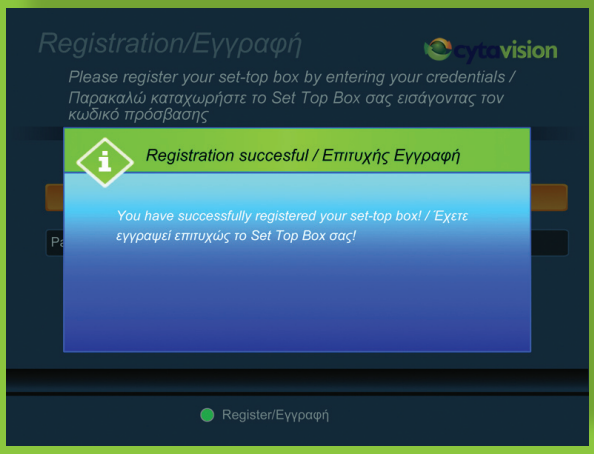

If you have wrongly entered the information, you will see this screen instead:

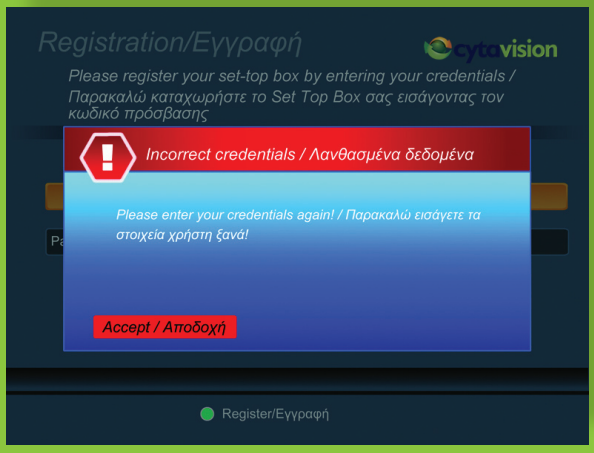

The screen below will appear for about 1 minute if you have correctly entered the information and after that you will be able to watch all channels.

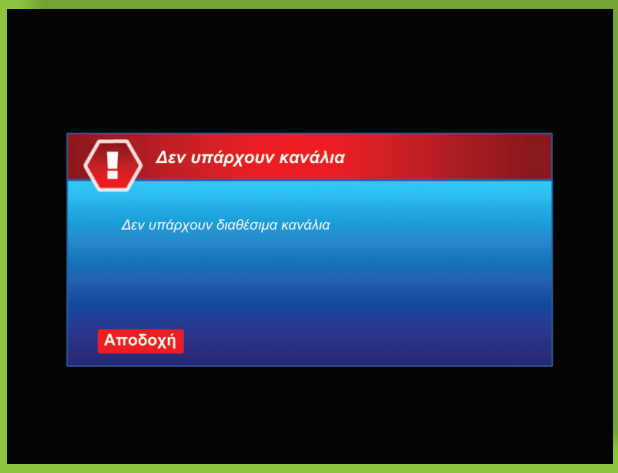

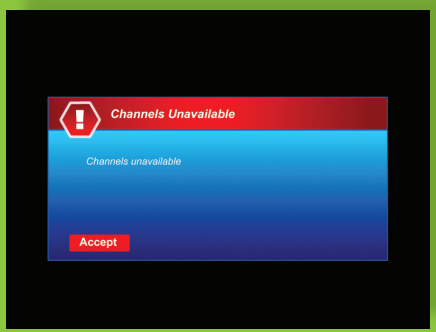

Remote Connection of 2nd Set Top Box

Select one of the following ways if you want to install the 2nd STB in another room or floor away from the DSL modem:

1. Use a pair of power-LAN devices that can be bought from any Cytashop or other electronic shops. The first power-LAN is plugged into an electrical socket next to the DSL modem and then it is connected to it with an Ethernet cable. The other power-LAN is plugged into an electrical socket next to the Set Top Box and then it is connected to it with an Ethernet cable.

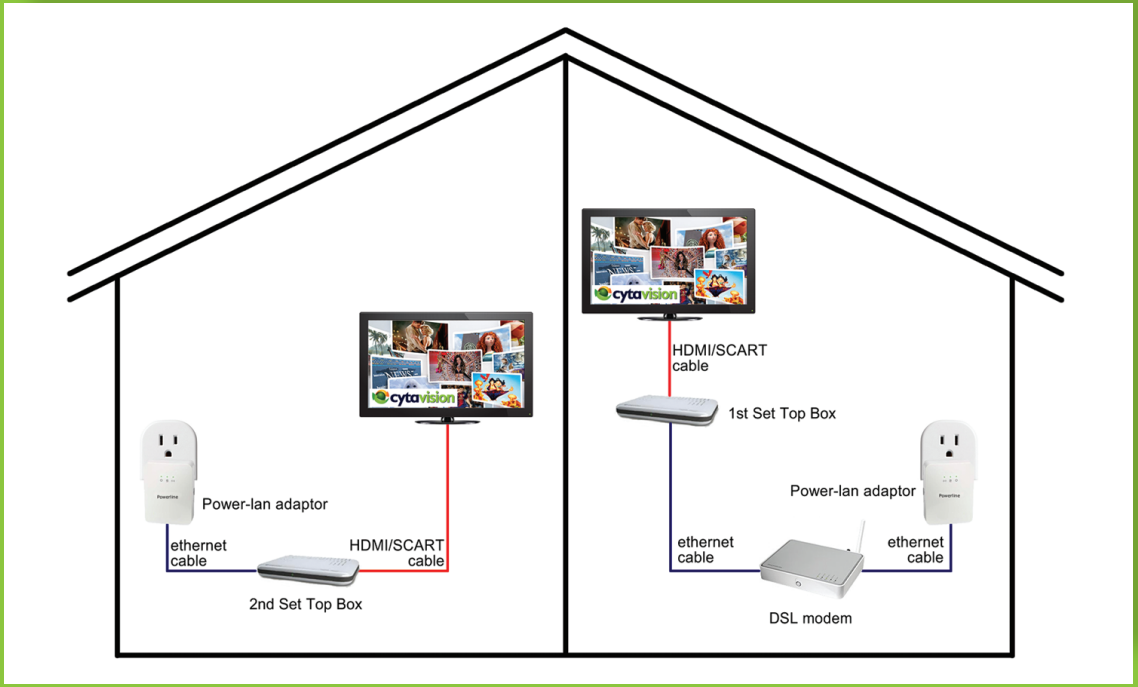

2. Alternatively, using the assistance of an electrician run an Ethernet cable through the existing telephone wiring infrastructure. In some cases you may also need to use cable trunking to run the Ethernet cable along walls.

Now you need to register as a user of the Cytavision service following the instructions provided in this manual.